


Clamping Stud

Material: Medium carbon steel, hardened and tempered to 8.8 grade as per IS : 1367 – 2002 (Part III) and Chemically Blackened.

Note: Other sizes/grades available on request.

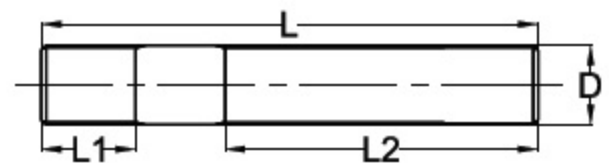

TYPE: T2-CS IS: 13178 - 1991

| TYPE | ØD x L | L1 | L2 | Weight in kg |
|-------------|-----------|----|-----|--------------|
| T2-CS-840 | M8 x 40 | 11 | 20 | 0.015 |
| T2-CS-850 | M8 x 50 | 11 | 25 | 0.016 |
| T2-CS-863 | M8 x 63 | 11 | 40 | 0.020 |
| T2-CS-880 | M8 x 80 | 11 | 50 | 0.030 |
| T2-CS-8100 | M8 x 100 | 11 | 63 | 0.040 |
| T2-CS-1050 | M10 x 50 | 13 | 25 | 0.025 |
| T2-CS-1063 | M10 x 63 | 13 | 40 | 0.030 |
| T2-CS-1080 | M10 x 80 | 13 | 50 | 0.040 |
| T2-CS-10100 | M10 x 100 | 13 | 63 | 0.050 |
| T2-CS-10125 | M10 x 125 | 13 | 75 | 0.065 |
| T2-CS-1250 | M12 x 50 | 15 | 25 | 0.035 |
| T2-CS-1263 | M12 x 63 | 15 | 32 | 0.050 |
| T2-CS-1280 | M12 x 80 | 15 | 50 | 0.060 |
| T2-CS-12100 | M12 x 100 | 15 | 63 | 0.070 |
| T2-CS-12125 | M12 x 125 | 15 | 75 | 0.095 |
| T2-CS-12160 | M12 x 160 | 15 | 100 | 0.120 |
| T2-CS-12200 | M12 x 200 | 15 | 125 | 0.150 |
| T2-CS-1663 | M16 x 63 | 19 | 32 | 0.085 |
| T2-CS-1680 | M16 x 80 | 19 | 50 | 0.105 |
| T2-CS-16100 | M16 x 100 | 19 | 63 | 0.135 |
| T2-CS-16125 | M16 x 125 | 19 | 75 | 0.170 |

TYPE: T2-CS IS: 13178 - 1991

| TYPE | ØD x L | L1 | L2 | Weight in kg |
|-------------|-----------|----|-----|--------------|
| T2-CS-16160 | M16 x 160 | 19 | 100 | 0.220 |
| T2-CS-16200 | M16 x 200 | 19 | 125 | 0.275 |
| T2-CS-16250 | M16 x 250 | 19 | 160 | 0.340 |
| T2-CS-2080 | M20 x 80 | 27 | 32 | 0.170 |
| T2-CS-20100 | M20 x 100 | 27 | 63 | 0.270 |
| T2-CS-20125 | M20 x 125 | 27 | 70 | 0.265 |
| T2-CS-20160 | M20 x 160 | 27 | 100 | 0.340 |
| T2-CS-20200 | M20 x 200 | 27 | 125 | 0.430 |
| T2-CS-20250 | M20 x 250 | 27 | 160 | 0.540 |
| T2-CS-20315 | M20 x 315 | 27 | 190 | 0.680 |
| T2-CS-20400 | M20 x 400 | 27 | 250 | 0.965 |
| T2-CS-20500 | M20 x 500 | 27 | 315 | 1.095 |
| T2-CS-24100 | M24 x 100 | 35 | 45 | 0.310 |
| T2-CS-24125 | M24 x 125 | 35 | 70 | 0.380 |
| T2-CS-24160 | M24 x 160 | 35 | 100 | 0.490 |
| T2-CS-24200 | M24 x 200 | 35 | 125 | 0.615 |
| T2-CS-24250 | M24 x 250 | 35 | 160 | 0.775 |
| T2-CS-24315 | M24 x 315 | 35 | 190 | 0.970 |
| T2-CS-24400 | M24 x 400 | 35 | 250 | 1.230 |
| T2-CS-24500 | M24 x 500 | 35 | 315 | 1.535 |

TYPE: T2-CS IS: 13178 - 1991

| TYPE | ØD x L | L1 | L2 | Weight in kg |
|-------------|-----------|----|-----|--------------|
| T2-CS-30125 | M30 x 125 | 43 | 56 | 0.480 |
| T2-CS-30160 | M30 x 160 | 43 | 100 | 0.760 |
| T2-CS-30200 | M30 x 200 | 43 | 125 | 0.950 |
| T2-CS-30250 | M30 x 250 | 43 | 160 | 1.210 |
| T2-CS-30315 | M30 x 315 | 43 | 190 | 1.480 |
| T2-CS-30400 | M30 x 400 | 43 | 250 | 1.970 |
| T2-CS-30500 | M30 x 500 | 43 | 315 | 2.455 |
| T2-CS-30700 | M30 x 700 | 43 | 400 | 3.440 |
| T2-CS-36160 | M36 x 160 | 51 | 80 | 0.945 |
| T2-CS-36200 | M36 x 200 | 51 | 125 | 1.180 |
| T2-CS-36250 | M36 x 250 | 51 | 160 | 1.475 |
| T2-CS-36315 | M36 x 315 | 51 | 190 | 1.855 |
| T2-CS-36400 | M36 x 400 | 51 | 250 | 2.360 |
| T2-CS-36500 | M36 x 500 | 51 | 315 | 2.950 |
| T2-CS-36700 | M36 x 700 | 51 | 400 | 4.125 |